



Accurately Weighing Africa



3410

Shear Beam Load Cell



Sasco is a dynamic weighing solutions focused company which procures and supports a leading range of globally sourced industrial weighing technologies. Sasco has the highest metrological ranking of any Southern and Central African company, and as a result of our experience gained through 100 years of operation, we are uniquely positioned to specify and supply optimal weighing equipment, automation and weighing information data solutions to Southern and Central Africa's leading industrial companies. Sasco reputation has been built on innovation and choice underpinned by professionalism, modernity and experience.

GENERAL

Model 3410 is a low-profile shear beam load cell designed for high accuracy platform scales, pallet scales and process weighing applications. It has high immunity to shock or side loading and is available in 2 or 3 mV/V sensitivity. Approved to OIML, NTEP standards. For hazardous environments this load cell is available with EEx ia IIC T6 level of European approval.

Nickel plating and full environmental sealing assures long-term reliability. A stainless-steel option is available for the Ib versions for use in harsh or corrosive environments. The two additional sense wires feedback the voltage reaching the load cell.

Complete compensation of changes in lead resistance due to temperature change and/or cable extension is achieved by feeding this voltage into the appropriate electronics.



FEATURES

- Capacities 250–2000 kg and 1000–4000 lbs
- Steel and stainless-steel construction
- OIML R60 and NTEP approved
- IP67 protection
- Optional


OPTIONAL FEATURES

- EEx ia IIC T6 hazardous area approval
- FM approval available


APPLICATIONS

- Low profile platforms
- Pallet truck weighing
- Tank and silo weighing

WIRING SCHEMATIC DIAGRAM

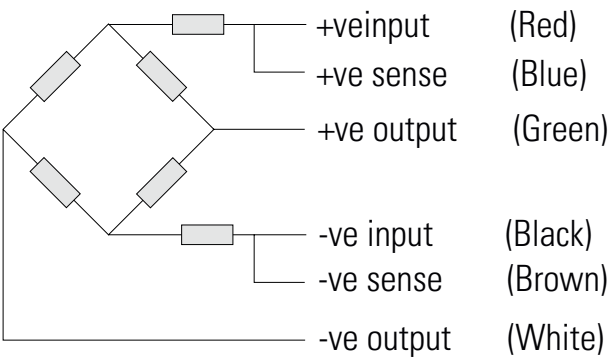

OUTLINE DIMENSIONS - In millimeters

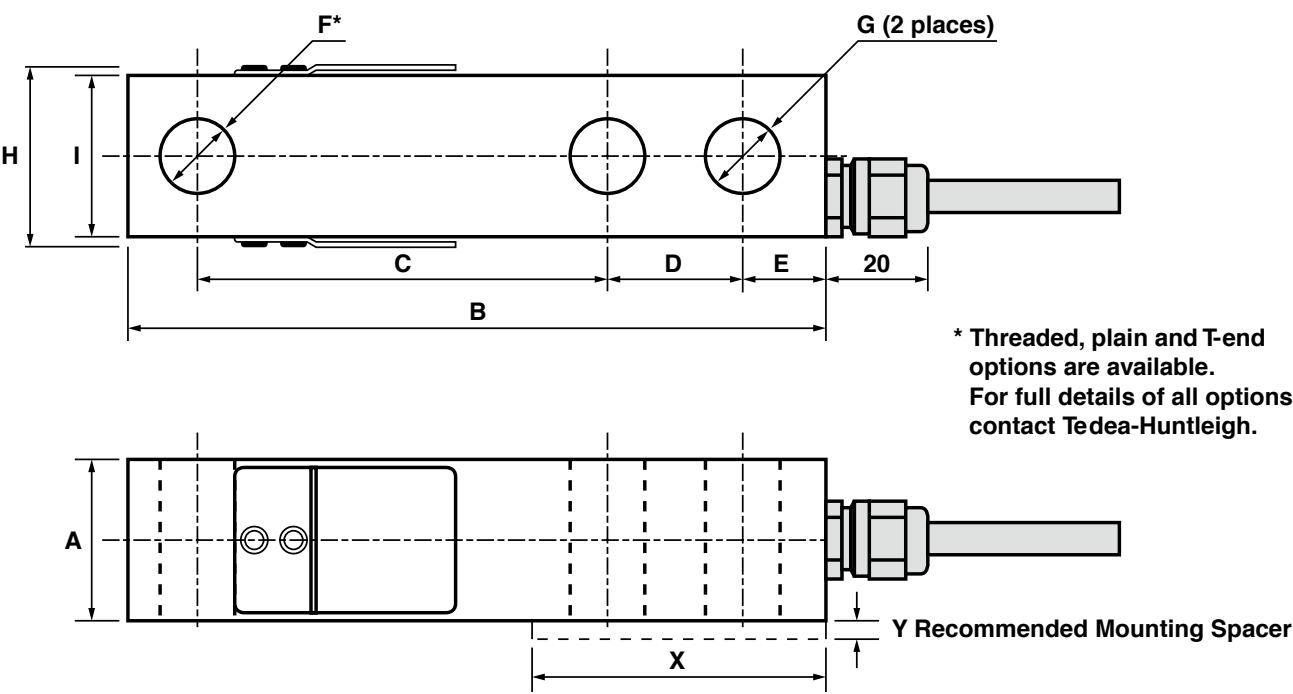

CAPACITY	A	B	C	D	E	ØF	ØG	H	I	X	Y
1000, 1500, 2500, 4000 lbs	30.5	130	76.2	25.4	16	Ø13.5	Ø13.5	34.0	30.5	57	4
250, 500, 1000 kg	30.5	130	76.2	25.4	16	M12*	Ø13.5	34.0	30.5	57	4
2000 kg	36	130	76.2	25.4	16	M12*	Ø13.5	34.0	30.5	57	4

* Tapped M12 X 1.75 & counterbored Ø13.5 X 14.5 Deep



SPECIFICATIONS

PARAMETER	VALUE			UNIT
Rated capacity—R.C. (Emax)	250, 500, 1000, 2000			kg
Rated capacity—R.C. (Emax)	1000, 1500, 2500, 4000			lbs
NTEP/OIML accuracy class	NTEP	Non-Approved	C3	
Maximum no. of intervals (n)	3000 single 5000 multiple	1000	3000 (1)	
Y = Emax/Vmin	6666	1400	10000	Maximum available
Rated output-R.O.	2.0 for kg and 3.0 for lbs			mV/V
Rated output tolerance	0.1			±% of rated output
Zero balance	2			±% of rated output
Zero return, 30 min.	0.0250	0.0300	0.0170	±% of applied load
Total error (per OIML R60)	0.0200	0.0500	0.0200	±% of rated output
Temperature effect on zero	0.0023	0.0100	0.0023	±% of rated output/°C
Temperature effect on output	0.0010	0.0030	0.0010	±% of applied load/°C
Temperature range	-10 to +40			°C
Temperature range, safe	-20 to +70			°C
Maximum safe central overload	150			% of R.C.
Ultimate central overload	300			% of R.C.
Excitation, recommended	10			VDC or VAC RMS
Excitation, maximum	15			VDC or VAC RMS
Input impedance	385±10			Ω
Output impedance	351±5			Ω
Insulation resistance	>2000			MΩ
Cable length	3.0—3410 6.0—3411			m
Cable type	6-wire, braided, polyurethane,			Standard
Construction	Nickel-plated alloy steel and			
Environmental protection	IP67			
Recommended torque	136			N*m

* 50% utilization

All specifications subject to change without notice.

SMART SUPPORT

0861 422 134 OR +27 83 680 0722

E-mail: info@sascoafrica.com

Web: www.sascoafrica.com

24 hours, 7 Days a week

Group Support Head Office:

2 Blackburn Street
Apex Industrial, Benoni

Phone: +27 (0) 11 746 6000

Fax: +27 (0) 11 746 6100

This brochure contains a general guide of the product only and shall not form part of any contract unless specifically agreed by Sasco Africa in writing in each case on the Order Acknowledgement. The specification of the product described herein may vary from time to time and may be altered without notice. Sasco Africa, its directors, staff, owners and affiliated companies and organisations cannot be held liable for any resulting damage or injury sustained as a result of the machines being used in excess of their capacities and ultimate overload limits.

